


Proximity Inductive Sensors Standard range, Nickel-Plated Brass Housing Types ICB, M18

CARLO GAVAZZI

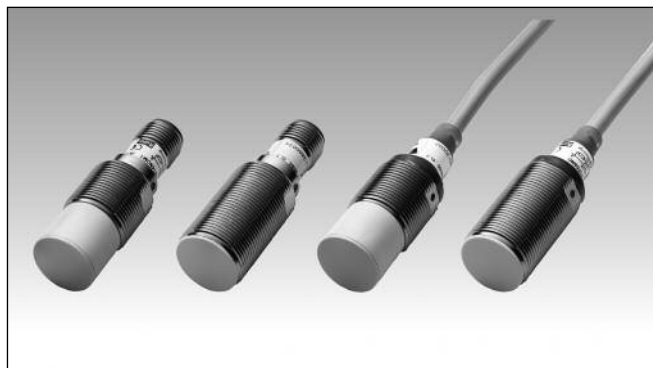

- Sensing distance: 5 to 8 mm
- Flush and non-flush types
- Short and long body versions
- Rated operational voltage (U_b): 10 - 36 VDC
- Output: DC 200 mA, NPN or PNP
- Normally open, Normally closed
- LED indication for output ON
- Protection: reverse polarity, short circuit, transients
- Cable and M12 plug versions
- According to IEC 60947-5-2

Product Description

A family of inductive proximity switches in industrial standard nickel-plated brass housings. They are able to handle applications where high sensing range is requested.

Output is open collector NPN or PNP transistors.

Ordering Key

ICB18SF05NOM1

Type _____
 Housing style _____
 Housing material _____
 Housing size _____
 Housing length _____
 Detection principle _____
 Sensing distance _____
 Output type _____
 Output configuration _____
 Connection _____

Type Selection

Conne- ction	Body style	Rated operating distance S_n	Ordering no. NPN Normally open	Ordering no. PNP Normally open	Ordering no. NPN Normally closed	Ordering no. PNP Normally closed
Cable	Short	5 mm ¹⁾	ICB 18 SF 05 NO	ICB 18 SF 05 PO	ICB 18 SF 05 NC	ICB 18 SF 05 PC
Cable	Short	8 mm ²⁾	ICB 18 SN 08 NO	ICB 18 SN 08 PO	ICB 18 SN 08 NC	ICB 18 SN 08 PC
Plug	Short	5 mm ¹⁾	ICB 18 SF 05 NOM1	ICB 18 SF 05 POM1	ICB 18 SF 05 NCM1	ICB 18 SF 05 PCM1
Plug	Short	8 mm ²⁾	ICB 18 SN 08 NOM1	ICB 18 SN 08 POM1	ICB 18 SN 08 NCM1	ICB 18 SN 08 PCM1
Cable	Long	5 mm ¹⁾	ICB 18 LF 05 NO	ICB 18 LF 05 PO	ICB 18 LF 05 NC	ICB 18 LF 05 PC
Cable	Long	8 mm ²⁾	ICB 18 LN 08 NO	ICB 18 LN 08 PO	ICB 18 LN 08 NC	ICB 18 LN 08 PC
Plug	Long	5 mm ¹⁾	ICB 18 LF 05 NOM1	ICB 18 LF 05 POM1	ICB 18 LF 05 NCM1	ICB 18 LF 05 PCM1
Plug	Long	8 mm ²⁾	ICB 18 LN 08 NOM1	ICB 18 LN 08 POM1	ICB 18 LN 08 NCM1	ICB 18 LN 08 PCM1

¹⁾ For flush mounting in metal

²⁾ For non-flush mounting in metal









Specifications

Rated operational voltage (U_b)	10 to 36 VDC (ripple incl.)	Assured operating sensing distance (S_a)	$0 \leq S_a \leq 0.81 \times S_n$
Ripple	$\leq 10\%$	Effective operating distance (S_r)	$0.9 \times S_n \leq S_r \leq 1.1 \times S_n$
Output current (I_a)	≤ 200 mA @ 50°C (≤ 150 mA @ 50-70°C)	Usable operating distance (S_u)	$0.9 \times S_r \leq S_u \leq 1.1 \times S_r$
OFF-state current (I_r)	≤ 50 μ A	Repeat accuracy (R)	$\leq 10\%$
No load supply current (I_o)	≤ 15 mA	Differential travel (H) (Hysteresis)	1 to 20% of sensing dist.
Voltage drop (U_d)	Max. 2.5 VDC @ 200 mA	Ambient temperature	
Protection	Reverse polarity, short-circuit, transients	Operating	-25° to +70°C (-13° to +158°F)
Dielectric impulse voltage withstand	1 kV/0.5 J	Storage	-30° to +80°C (-22° to +176°F)
Power ON delay (t_r)	300 ms	Housing material	
Operating frequency (f)	≤ 1500 Hz	Body	Nickel-plated brass
Indication for output ON	LED, yellow	Front	Grey thermoplastic polyester





Specifications (cont.)

Connection		Approvals	UL
Cable	2 m, 3 x 0.3 mm ² , grey PVC, oil proof M12 x 1	CE-marking	Yes
Plug		EMC protection	According to IEC 60947-5-2
Degree of protection	IP 67	IEC 6100-4-2 (ESD)	8 KV air discharge, 4 KV contact discharge
Weight (cable/nuts included)		IEC 6100-4-3	3 V/m
Cable	Max. 150 g	IEC 6100-4-4	2 kV
Plug	Max. 70 g	IEC 6100-4-6	3 V
Dimensions	See diagrams below	IEC 6100-4-8	30 A/m
Tightening torque	20.0 Nm		

Dimensions

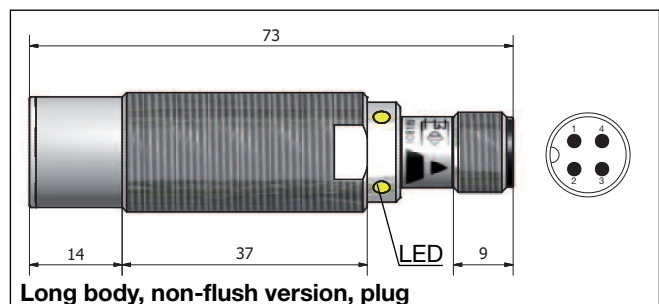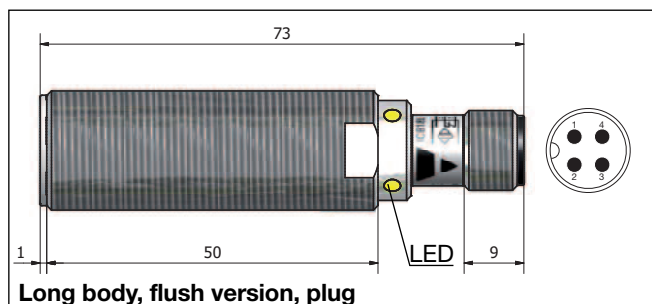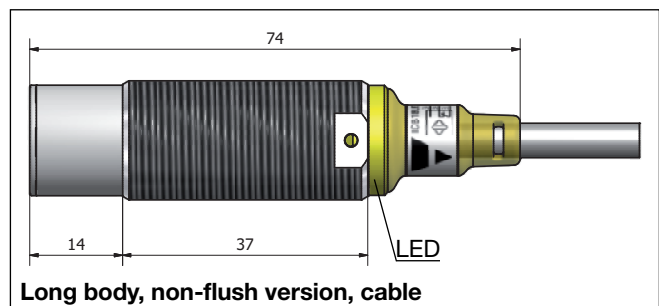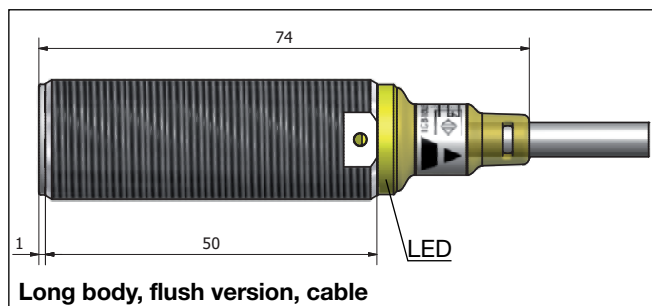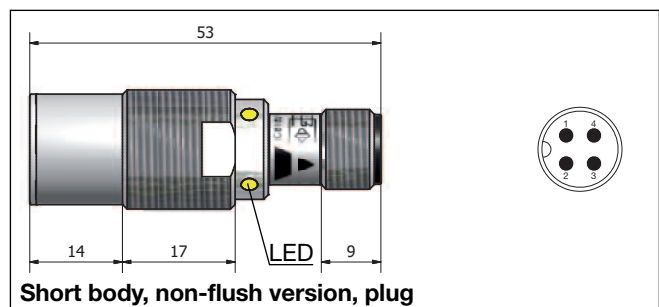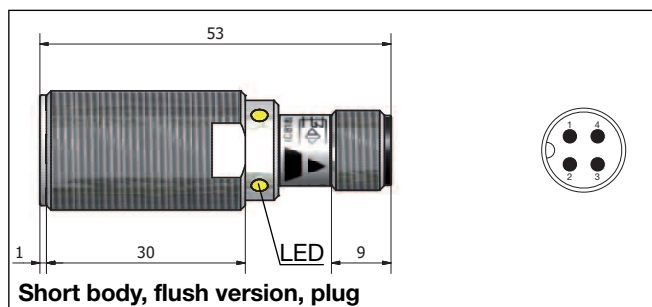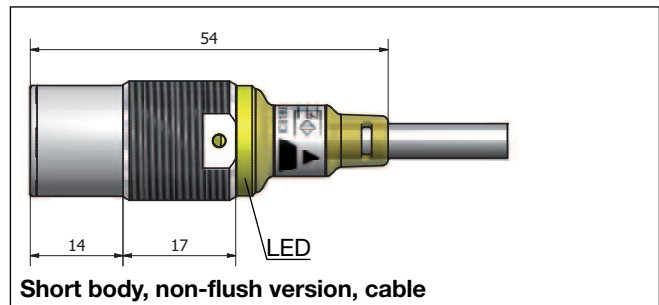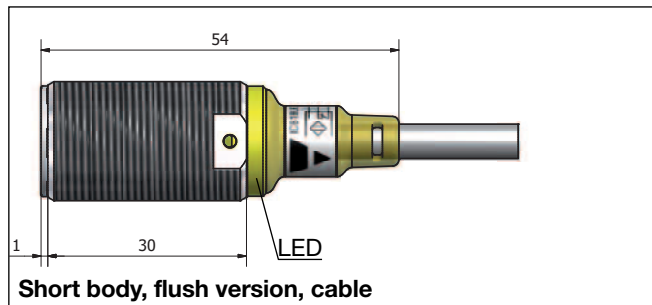


Wiring Diagrams

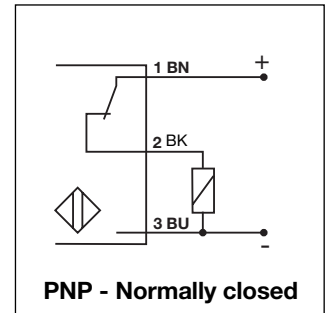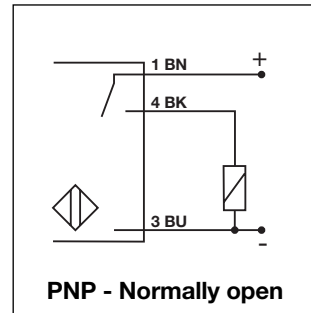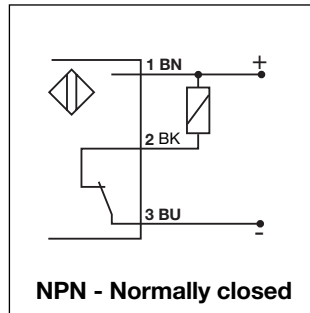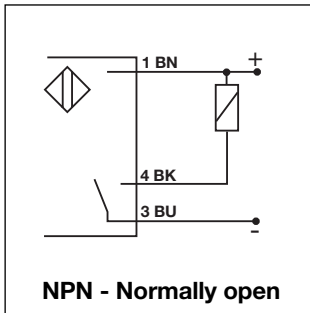


Installation


Flush sensor, when installed in damping material, must be according to Picture 1A.

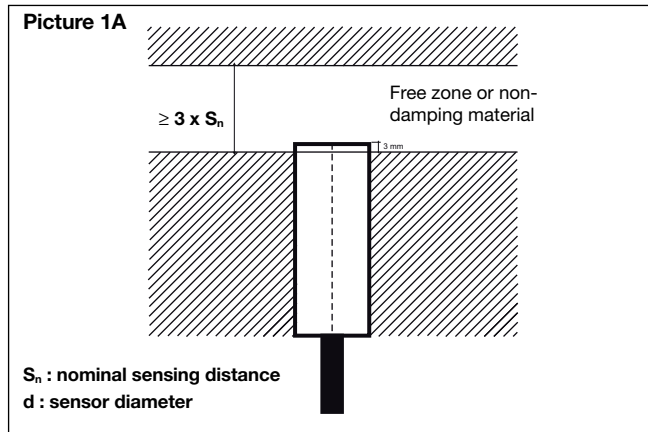


Non-flush sensor, when installed in damping material, must be according to Picture 1B.

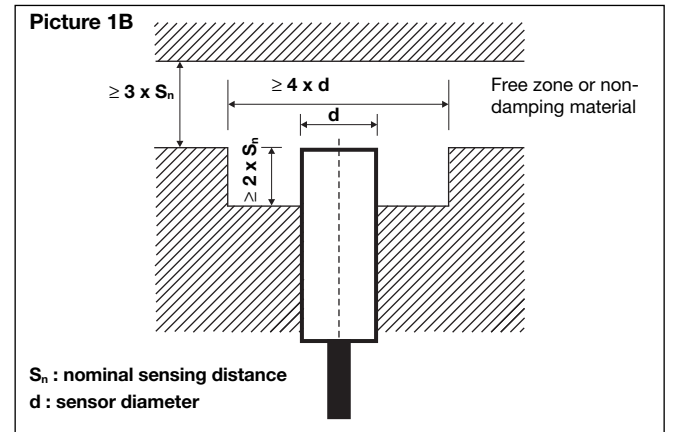


Flush sensors, when installed together in damping material, must be according to Picture 2A.

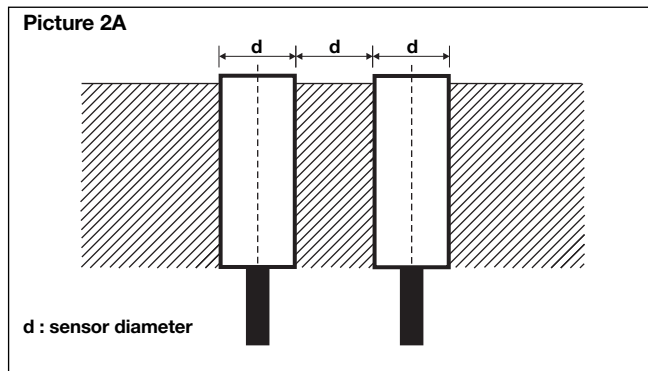

Non-flush sensors, when installed together in damping material, must be according to Picture 2B.

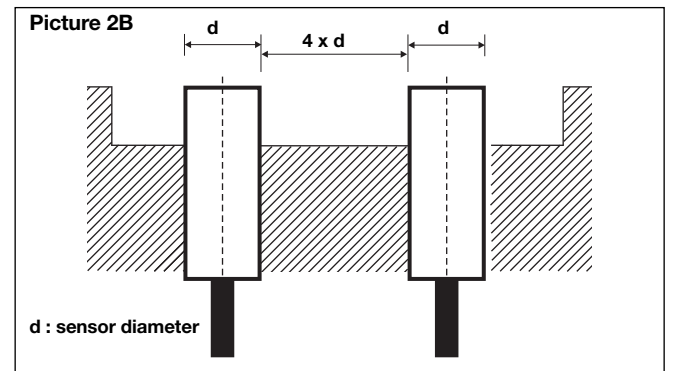

For sensors installed opposite each other, a minimum space of $6 \times S_n$ (the nominal sensing distance) must be observed (See Picture 3).

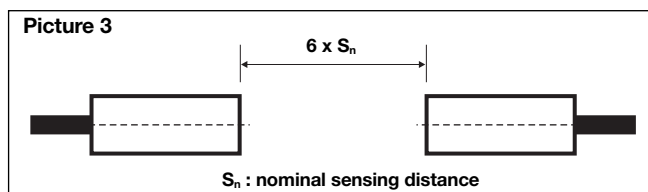

Reduction factors

The rated operating distance is reduced by the use of metals and alloys other than Fe360.

The most important reduction factors for inductive proximity sensors are shown in Picture 4.

Delivery Contents

- Inductive proximity switch ICB.
- 2 nuts NPB
- Packaging: plastic bag

